

Stack Emission

Test Report No.:

R-343-H-4-23-0220t

Plant: **Noble Energy Mediterranean Ltd.**

Location: **Aba Even 12 Street, Herzliya-Pituach, 46725. Israel.**
"LEVIATHAN" Sea Platform Site.

Person on Charge: **Gali Miron**

Stack ID: **Heater-4** **Stack (H-4).**

Stack ID No.:

Test No.: **343-H-4-23**

Test Format: **Technology Test**

Test Date: **11/02/2020**

Report Printing Date: **13/02/2020**

Testers Team: **Konstantin Kirichenko**

Valentin Sergeev

Report was Written by: **Nadezhda Grinberg**

Report was Checked by: **Alexey Ratner**



Test Procedure.

Plant: Noble Energy Mediterranean Ltd.

City: "LEVIATHAN" Sea Platform Site.

Sampling Date: 11/02/2020

Stack Location: Heater-4

Hazard Tested:

Hazard	Sampling Method	Analytical Method	Analytical Lab	Remarks
TOC as Carbon	EPA-25a	FID	Ecolab	
Burnt Gases	EPA-3a	Analyser	Ecolab	
Gas Flowrate	EPA-1, 2, 4	-----	Ecolab	

Sampling Site:

- Two Sampling Ports (4", 90 degrees).
- About 2 Dst DownStream up to the Last Turbulence.
- More than 2 Dst UpStream up to the Next Turbulence.

SamplingTrain:

- TOC Analyser (FID, EPA-25a Flexible Configuration).
- Sampling Probe: Teflon, Flexible, Heated.

Test No.: **343-H-4-23 Technology**

FUEL:

Filter No.: **N.R.**

Stack Diameter: **73 cm** Measured

Stack Cross Area: **0.418 m2** = **4.50 ft2** Calculated

Nipple "A" Length: **17 cm** Measured

Nipple "A" Length: **17 cm** Measured

STACK GAS VELOCITY PROFILE (according to EPA Methods 1 and 2).

Traverse Point No.	Fraction of Stack ID %/100	Traverse Point Location cm	InStack Temperature oC	Delta Pi (calculated) mm H2O	Delta Pi (measured) in. H2O	Square Root of Delta Pi (in. H2O) ^{1/2}	Instack Static Pressure mm H2O
Sampling Port "A"							
1	0.979 *	87.5	146	13.72	0.54	0.735	
2	0.933	85.1	146	14.48	0.57	0.755	
3	0.882	81.4	146	14.73	0.58	0.762	
4	0.823	77.1	146	15.75	0.62	0.787	
5	0.750	71.8	146	16.76	0.66	0.812	
6	0.644	64.0	146	16.51	0.65	0.806	30
7	0.356	43.0	146	18.54	0.73	0.854	
8	0.250	35.3	146	18.29	0.72	0.849	
9	0.177	29.9	146	21.59	0.85	0.922	
10	0.118	25.6	146	22.35	0.88	0.938	
11	0.067	21.9	146	22.86	0.90	0.949	
12	0.021 *	19.5	146	24.89	0.98	0.990	
Sampling Port "B"							
13	0.979 *	87.5	146	14.22	0.56	0.748	
14	0.933	85.1	146	13.97	0.55	0.742	
15	0.882	81.4	146	14.48	0.57	0.755	
16	0.823	77.1	146	17.78	0.70	0.837	
17	0.750	71.8	146	18.03	0.71	0.843	
18	0.644	64.0	146	19.81	0.78	0.883	30
19	0.356	43.0	146	19.30	0.76	0.872	
20	0.250	35.3	146	21.34	0.84	0.917	
21	0.177	29.9	146	21.59	0.85	0.922	
22	0.118	25.6	146	22.61	0.89	0.943	
23	0.067	21.9	146	22.86	0.90	0.949	
24	0.021 *	19.5	146	23.11	0.91	0.954	
Average	-----	-----	146.0	18.73	0.738	0.855	30.0

Remarks:

1. Traverse Points Locations were Measured from the Nipples Ends.
2. Instack Static Pressure was Measured in 2 Traverse Points.
3. Traverse Points No. 1, 12, 13 and 24 Locations were moved to 1" Distances from the Stack Walls, according to EPA-1 Method Requirements.

Combustion Gases Measurements Data Analyser (EPA-3 Method).

Test Time: **14:25**

Time	O2 Conc-n	CO2 Conc-n
HH:mm	% v	% v
14:25	5.14	10.18
Average	5.14	10.18
0 oC -		
NORM. TO 3 % Oxygen		
EMISSION RATE, g/Hour		

Real Stack Gas Dry Molecular Weight, Calculated, According to EPA Method 3a:

Md real	=	29.83 g/Mole
----------------	---	---------------------


TOC (Total Organic Carbon) Determination.

according to EPA Method No. 25a.

Meaure- ment	Time	FID Reading as Propane	TOC Conc-n (calculated, as Carbon)	TOC Conc-n (calculated, as Carbon, St-d Cond-s, 0 oC)	TOC Conc-n (calculated, as Carbon, St-d Cond-s, 0 oC, Norm. to 3 % O2)	TOC Emission Rate (as Carbon)	Remarks
No.	HH:mm	ppm	ppm	mg/dscm	mg/dscm	g/Hour	
1	14:05	22.09	66.27	41.8	47.4	617.6	
2	14:06	14.37	43.11	27.2	30.9	401.7	
3	14:07	21.68	65.04	41.0	46.6	606.1	
4	14:08	17.61	52.83	33.3	37.8	492.3	
5	14:09	18.42	55.26	34.8	39.6	515.0	
6	14:10	12.98	38.94	24.5	27.9	362.9	
7	14:11	17.51	52.53	33.1	37.6	489.5	
8	14:12	16.38	49.14	31.0	35.2	457.9	
9	14:13	18.10	54.30	34.2	38.9	506.0	
10	14:14	19.61	58.83	37.1	42.1	548.2	
11	14:15	18.25	54.75	34.5	39.2	510.2	
12	14:16	13.98	41.94	26.4	30.0	390.8	
13	14:17	13.43	40.29	25.4	28.8	375.5	
14	14:18	18.28	54.84	34.6	39.3	511.0	
15	14:19	15.40	46.20	29.1	33.1	430.5	
16	14:20	16.99	50.97	32.1	36.5	475.0	
17	14:21	16.84	50.52	31.8	36.2	470.8	
18	14:22	20.14	60.42	38.1	43.3	563.0	
19	14:23	14.75	44.25	27.9	31.7	412.4	
20	14:24	18.00	54.00	34.0	38.7	503.2	
21	14:25	22.12	66.36	41.8	47.5	618.4	
22	14:26	19.45	58.35	36.8	41.8	543.8	
23	14:27	20.34	61.02	38.5	43.7	568.6	
24	14:28	11.01	33.03	20.8	23.6	307.8	
25	14:29	14.62	43.86	27.6	31.4	408.7	
26	14:30	17.34	52.02	32.8	37.2	484.8	
27	14:31	14.48	43.44	27.4	31.1	404.8	
28	14:32	16.62	49.86	31.4	35.7	464.6	
29	14:33	18.80	56.40	35.5	40.4	525.6	
30	14:34	15.33	45.99	29.0	32.9	428.6	
Average	-----	17.16	51.49	32.45	36.86	479.84	

- Remarks:**
1. The Concentrations were Calculated at Standard Conditions (Dry Gas, 0 oC, Atmospheric Pressure) and Normalized to 3% O2.
 2. Analytical Method: TOC FID Analyser.
Flame Ionization Detector (FID) was Calibrated before the Test with 3 Propane Calibration Gases (EPA Protocol Quality)
 3. Measuring Time: 14:05-14:34

**Noble Energy - Leviathan Sea Platform. Heater-4 Stack.
Technology Test .11/02/2019. TOC as Carbon.**

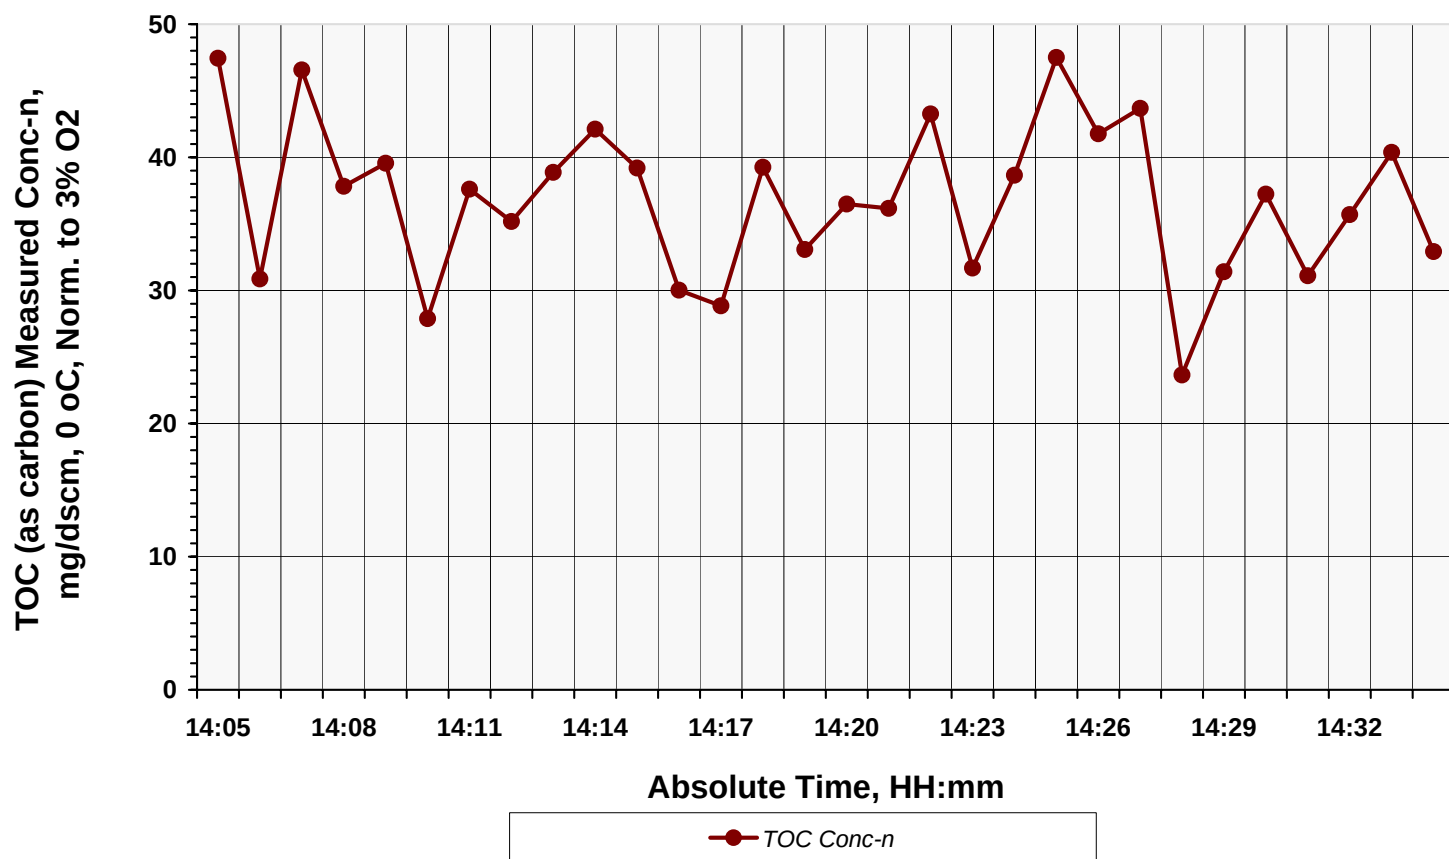

CALCULATIONS.

Barometric Pressure (Pbar):.....	755 mm Hg =	29.72 in. Hg	Measured
InStack Static Pressure (Pg):.....	2.21 mm Hg =	0.087 in. Hg	Measured
InStack Absolute Pressure (Pso):.....	757.2 mm Hg =	29.81 in. Hg	Calculated
InStack Gas Temperature (Tso):.....	146.0 o C =	754 o R	Calculated
Dry Gas Molecular Weight (Md):.....	29.83 g/Mole		Measured
Water Content in the Gas Stream:.....	0.15 Mole Parts		Assumed
Wet Gas Molecular Weight :.....	28.06 g/Mole		Calculated
Pito't Tube Calibration Factor (Cp):.....	0.84 Calibrated	at 18/11/19	Calibrated

Stack Gas Velocity and Flowrate

Stack Gas Velocity (Vso):.....	17.77 m/sec	Calculated
Stack Gas Flowrate (Stack Cond., Qao):.....	26,765 acm/Hr	Calculated
Stack Gas Flowrate (St-d Cond., Qso):.....	14,786 dscm/Hr	Calculated

TOC Analyser Calibration Data.

TOC Calibration Field Test.

$$\text{Calibration Error (\%)} = ((CR - CTC) / CTC) * 100\%$$

Calibration Gas	Certified TOC Conc-n (CTC) ppm	Analyser Reading (CR) ppm	Adjusted to ppm	Cali-bration Error %	Max. Allowed Error % of CTC	Status	Average Response Time sec	Remarks
Zero	0.00	0.06	0.00	-----	-----	-----		
Low-Level (~30%)	6.41	6.44	-----	0.47	+ - 5%	V		Diluted
Mid-Level (~50%)	12.33	12.41	-----	0.65	+ - 5%	V		Diluted
High Level (~85%)	22.10	22.39	22.10	-----	-----	-----	23	Diluted
Span Value (~2*ELV)	25.0							

TOC Calibration POST-RUN Test.

$$\text{Calibration Error (\%)} = ((CR - CTC) / SPAN) * 100\%$$

Time HH:mm	Calibration Gas	Certified TOC Conc-n (CTC) ppm	Analyser Reading (CR) ppm	Cali-bration Drift %	Max. Allowed Error % of SPAN	Status	Remarks
17:10	Zero	0.00	0.09	0.36	+ - 3%	V	
17:18	Mid-Level	12.33	12.48	0.60	+ - 3%	V	

Table of Results.

Stack ID	Facilities Connected to the Stack		Test Methods					Test Results								
			Hazard	Test	Sampling	Analytical	Hazard	Stack	Stack	Stack	Oxygen	Oxygen	Hazard	Hazard	Remarks	Hazard
	Facility	Worked in the Same Time	Tested	Uncertainty	Method	Method	TA-LUFT Classification	Gas Temperature	Gas Water Content	Gas Flowrate (St-d Cond-s)	Measured	for Normalization	Conc-n (St-d Cond-s)	Conc-n (St-d Cond-s, Norm-d to Oxygen)		Emission Rate
				%				o C	% v	dscm/Hr	% v	% v	mg/dscm	mg/dscm		Kg/Hr
Heater-4 Stack	Heater-4 Test No.: 343-H-4-23	1	TOC as Carbon	12.70	EPA-25a *	FID *	OS-III	146.0	15	14,786	5.14	3.0	32.45	36.86		0.4798
									assumed							

Remarks: 1. The Concentrations were Calculated at Standard Conditions (Dry Gas, 0 oC, Atmospheric Pressure) and Normalized to 3% O2.
 2. TOC Concentrations were Calculated as Carbon.
 3. "< LOD" = less than the Limit of Determination. "< LOQ" = less than the Limit of Quantification.
 4. "*" - the Test was Proceeded under ISO-17025 Accreditation.

***** END OF THE REPORT *****